




DCA-70D | DCI-70D PASS THROUGH DOOR

Technical Features


The reference values are based on standard model

CHARACTERISTICS	DCA-70D	DCI-70D
Indicative weight	180 Kg / 397 lbs	180 Kg / 397 lbs
Internal dimensions (WxDxH)	600x415x1430 mm 23.6"x16.3"x56.3"	600x415x1430 mm 23.6"x16.3"x56.3"
Internal volume	365 lt / 96.4 US gal	365 lt / 96.4 US gal
Internal pressure	725 Pa	725 Pa
Average air flow rate into cabinet	100 m ³ /h	100 m ³ /h
HEPA H14 filter	2 x (150x150x68mm) 2 x (5.9"x5.9"x2.67")	2 x (150x150x68 mm) 2 x (5.9"x5.9"x2.67")
Thermal dispersion (Maximum)	358947,37 J/h (341 BTU/h)	358947,37 J/h (341 BTU/h)
Noise	<60 (dBA)	<60 (dBA)
Communication ports	USB per PC	USB per PC

External dimensions

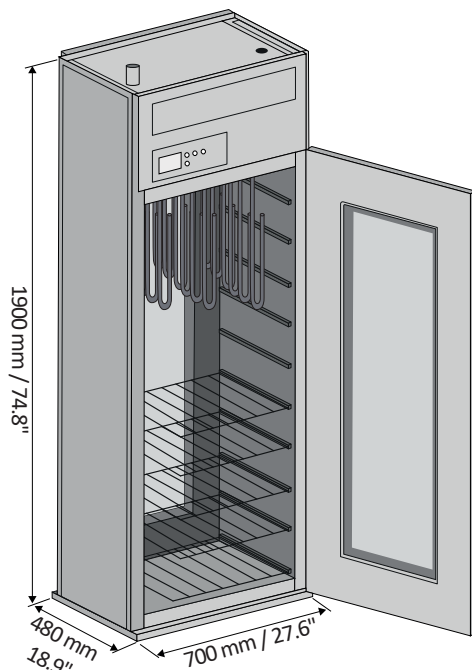

DCA-70D
Pass through-door

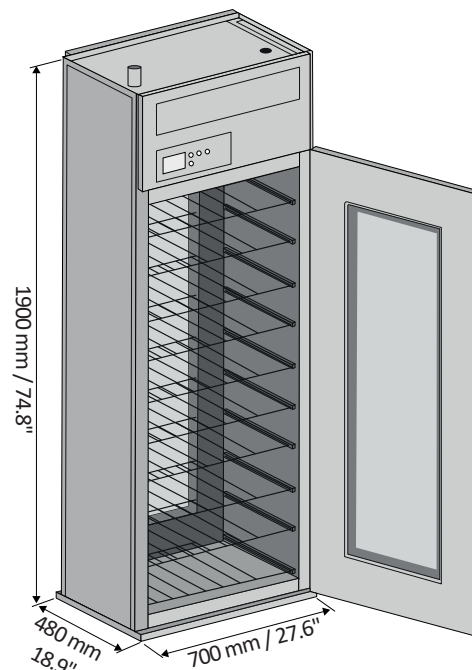

DCI-70D
Pass through-door



AT-OS SRL

Viale del Lavoro, 19- 37030 Colognola ai Colli - Verona - ITALY

Tel (+39) 045 6159411- Fax (+39) 045 6159422

info@at-os.com | www.at-os.com

